

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)


PCT

(10) International Publication Number
WO 2005/042226 A1

- (51) International Patent Classification⁷: **B29C 45/18**, 47/10, H01B 13/14, B01F 5/04
- (21) International Application Number:
PCT/IT2003/000704
- (22) International Filing Date: 31 October 2003 (31.10.2003)
- (25) Filing Language: Italian
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **PIRELLI & C., S.P.A.** [IT/IT]; Via Negri 10, I-20123 Milano (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BALCONI, Luca** [IT/IT]; c/o Pirelli & C. S.P.A., Via Negri 10, I-20123 Milano (IT). **DELL'ANNA, Gaia** [IT/IT]; c/o Pirelli & C., S.P.A., Via Negri 10, I-20123 Milano (IT). **BAREGGI, Alberto** [IT/IT]; c/o Pirelli & C., S.P.A., Via Negri 10, I-20123 Milano (IT). **BELLI, Sergio** [IT/IT]; c/o Pirelli & C., S.P.A., Via Negri 10, I-20123 Milano (IT).
- (74) Agents: **BOTTERO, Claudio** et al.; Porta, Checcacci & Associati S.p.A., Viale Sabotino, 19/2, I-20135 Milano (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: METHOD AND PLANT FOR THE INTRODUCTION OF A LIQUID INTO A MOLTEN MASS UNDER PRESSURE

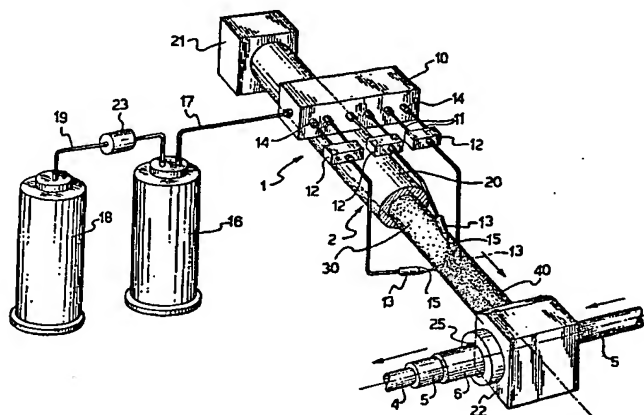

(57) Abstract: A method and plant (1) for the introduction of a liquid into a molten mass under pressure are described. Such a method and such a plant (1) are particularly but not exclusively suitable for the formation of a coating layer (5, 6, 7) on a cable element comprising at least one conductor (4), said layer (5, 6, 7) comprising an extruded thermoplastic polymer forming a continuous phase incorporating a dielectric liquid, and are useful, for example in the production of an electric cable (3) for the transportation and/or distribution of electrical power. The method comprises the steps of bringing the liquid to a predetermined pressure greater than the pressure of the molten mass; feeding the liquid into a plurality of storage tanks (12); and injecting the liquid into the molten mass at an injection pressure equal to the above-mentioned predetermined pressure by means of a plurality of injectors (13) in respective fluid communication with the plurality of storage tanks (12). Advantageously, this allows to accomplish a substantial continuity of delivery of the liquid in a technologically simple way and at low costs, while ensuring a dispersion as uniform as possible of the liquid within the molten mass.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.